

4

3

2

1



OPTIONAL SWING GATE OPEN/CLOSE POST X-0111/MSW

- HEIGHT 6 FT.
- GALVANIZED STEEL
- DIAMETER 2-3/8" OD
- D-RING
- ACORN POST CAP



OPTIONAL MANUAL SWING GATE & POST SAFETY TAPE KIT

- THICKNESS: 8 MIL.
- MUTCD COMPLIANT
- RED/WHITE
- INCREASES VISIBILITY

SINGLE GATE SYSTEMS
SUPPORTING DIAGONAL GUSSET RUNS OUT 10'

7216-4S/MSW
16' (FIELD SHORTEN UP TO 10')

7222-4S/MSW
22' (FIELD SHORTEN UP TO 10')

DOUBLE GATE SYSTEMS
SUPPORTING DIAGONAL GUSSET RUNS OUT 10'

BELOW DEPENDS ON SPACE BETWEEN GATES

32' (DUAL 16' SYSTEMS)
44' (DUAL 22' SYSTEMS)

3/4" x 10" J-HINGE

264" (MAXIMUM GATE LENGTH)

84 3/4"


74 3/32"

36"

24"

12"

10"

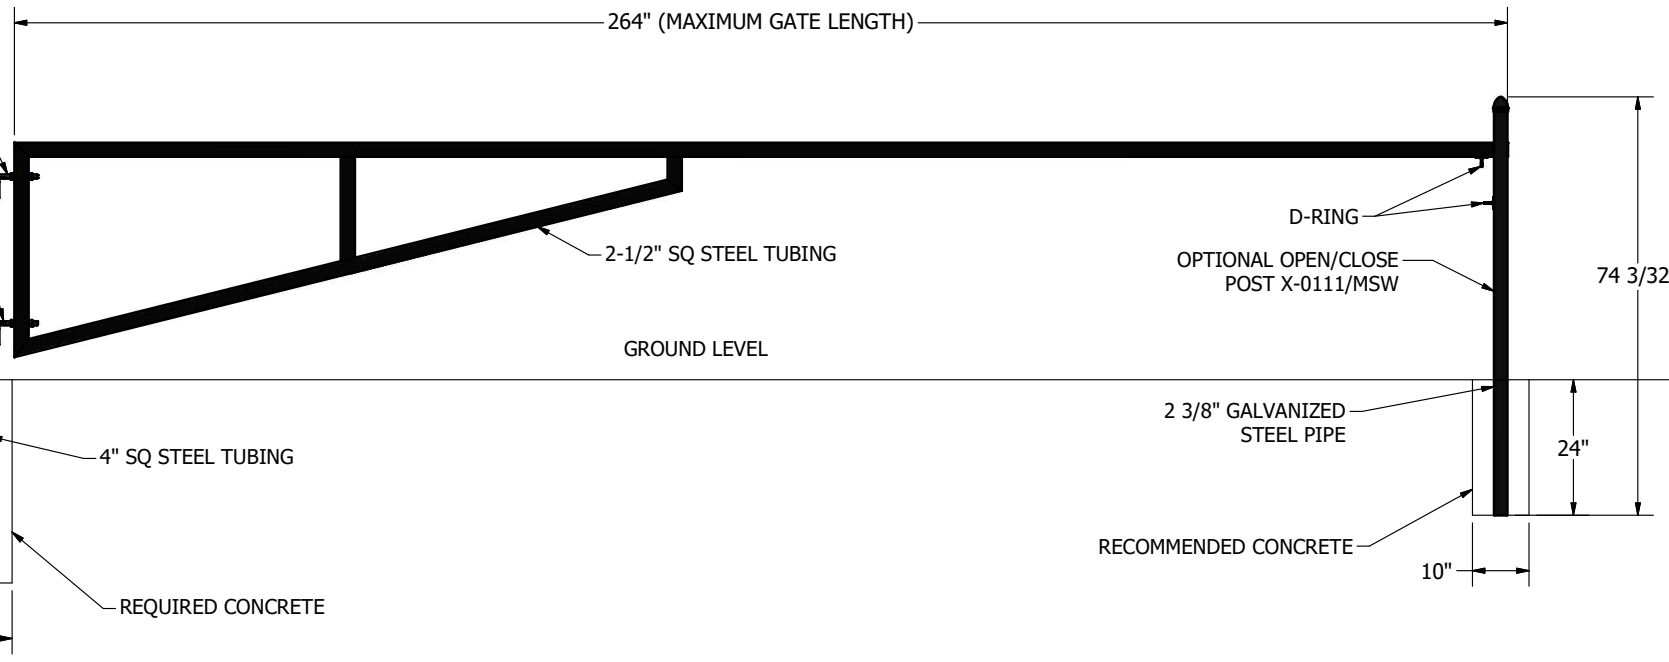

CONTACT INFORMATION:

WEB: www.AutoGate.com
 PHONE: (800) 944-4283
 EMAIL: Sales@AutoGate.com

MANUFACTURER:

AutoGate
 7306 Driver Road, PO Box 50
 Berlin Heights, OH 44814

MADE IN AMERICA

MEETS THE REQUIREMENTS OF THE
BUY AMERICAN ACT

PRODUCT SPECIFICATIONS:

LENGTH: 16' OR 22'
 MATERIAL: STEEL
 COATING: POWDER COATED
 INSTALLATION TYPE: IN-GROUND
 BARRIER GATE TYPE: MANUAL SWING GATE

4

3

2

1